



EXCELLENT QUALITY INNOVATION

# PROFESSIONAL PNEUMATIC TOOLS



[www.koyaxtools.com](http://www.koyaxtools.com)



WE (KOYAX INTERNATIONAL PVT. LTD.) ARE A PROFESSIONALLY ORGANIZED COMPANY BASED AT DELHI. WE ARE AN ISO 9001:2015 CERTIFIED COMPANY. OVER 16 YEARS EXPERIENCE & KNOWLEDGE OF INTERNATIONAL INDUSTRIAL SYSTEMS, DEDICATED TO PROVIDE THE BEST ECONOMICAL SOLUTIONS TO OUR VALUED CUSTOMERS.

WE INTRODUCE OURSELVES AS A MANUFACTURING, MARKETING, TRADING AND IMPORTING ENTIRE RANGE OF PNEUMATIC TOOLS, SPARES, ACCESSORIES AND SERVICES.

A TEAM OF HIGHLY QUALIFIED AND EXPERIENCE ENGINEERS ARE PLACED AT STRATEGIC LOCATION TO RENDER "JUST IN TIME" VALUE ADD SERVICE TO OUR CLIENTS BE IT PNEUMATIC TOOLING SOLUTIONS.

# CONTENTS

IMPACT WRENCH 3/8"	1	BELT SANDER	10
IMPACT WRENCH 1/2"	2	HIGH SPEED SANDER	10
IMPACT WRENCH 3/4"	2	POLISHER	11
IMPACT WRENCH 1"	3	HAMMER	11
SCREW DRIVER	3	CHIPPING HAMMER	11
PISTOL SCREW DRIVER	4	WELD FLEX	11
SHUT OFF SCREW DRIVER	4 - 5	SAND RAMMER	11
DRILL & TAPPER	6	RIVETER	11
RATCHET WRENCH	6	RIVNUT	12
RATCHET WRENCH (NARRO SPACE)	7 - 8	AIR BODY SAW	12
DIE & MICRO DIE GRINDER	8 - 9	ENGRAVING PEN	12
ANGLE GRINDER	9	ACCESSORIES	12
SANDER	10	ACCESSORIES (BITS)	13

# INDUSTRIAL IMPACT WRENCH 3/8"



**KT-1011**

SQUARE DRIVE : 3/8"  
 FREE SPEED (R.P.M.) : 11000  
 MAX TORQUE : 135 NM (100 FT-LB)  
 BOLT CAPACITY : 8-10 MM  
 OVERALL LENGTH : 160 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2 LBS (0.9 KGS)



**KT-1012**

SQUARE DRIVE : 3/8"  
 FREE SPEED (R.P.M.) : 10000  
 MAX TORQUE : 160 NM (118 FT-LB)  
 BOLT CAPACITY : 6-8 MM  
 OVERALL LENGTH : 195 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2.75 LBS(1.25 KGS)



**KT-1013**

SQUARE DRIVE : 3/8"  
 FREE SPEED (R.P.M.) : 8100  
 MAX TORQUE : 200 NM (148 FT-LB)  
 BOLT CAPACITY : 13 MM  
 OVERALL LENGTH : 220 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 1.5 LBS (0.7 KGS)



**KT-1014**

SQUARE DRIVE : 3/8"  
 FREE SPEED (R.P.M.) : 10000  
 MAX TORQUE : 244NM (180 FT-LB)  
 BOLT CAPACITY : 13 MM  
 OVERALL LENGTH : 166 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2.9 LBS (1.3 KGS)



**KT-1015**

SQUARE DRIVE : 3/8"  
 FREE SPEED (R.P.M.) : 7500  
 MAX TORQUE : 434 NM (320 FT-LB)  
 BOLT CAPACITY : 12-14 MM  
 OVERALL LENGTH : 122 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2.9 LBS (1.3 KGS)



**KT-1016**

SQUARE DRIVE : 3/8"  
 FREE SPEED (R.P.M.) : 10000  
 MAX TORQUE : 140 NM (103 FT-LB)  
 BOLT CAPACITY : 6-8 MM  
 OVERALL LENGTH : 220 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 3.08 LBS (1.4 KGS)



**KT-1017**

SQUARE DRIVE : 3/8"  
 FREE SPEED (R.P.M.) : 11000  
 MAX TORQUE : 475NM (350 FT-LB)  
 BOLT CAPACITY : 6-12 MM  
 OVERALL LENGTH : 126 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 3.09 LBS (1.4 KGS)



**KT-1018**

SQUARE DRIVE : 3/8"  
 FREE SPEED (R.P.M.) : 9000  
 MAX TORQUE : 180 NM (133 FT-LB)  
 BOLT CAPACITY : 10-12 MM  
 OVERALL LENGTH : 170 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 3.19 LBS (1.45 KGS)



**KT-1019**

SQUARE DRIVE : 3/8"  
 FREE SPEED (R.P.M.) : 9000  
 MAX TORQUE : 160 NM (118 FT-LB)  
 BOLT CAPACITY : 8-10 MM  
 OVERALL LENGTH : 170 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 3.34 LBS (1.52 KGS)



**KT-1020**

SQUARE DRIVE : 3/8"  
 FREE SPEED (R.P.M.) : 11000  
 MAX TORQUE : 135 NM (100 FT-LB)  
 BOLT CAPACITY : 8-10 MM  
 OVERALL LENGTH : 160 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2 LBS (0.9 KGS)



**KT-1021**

SQUARE DRIVE : 3/8"  
 FREE SPEED (R.P.M.) : 11000  
 MAX TORQUE : 135 NM (100 FT-LB)  
 BOLT CAPACITY : 8-10 MM  
 OVERALL LENGTH : 160 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2 LBS (0.9 KGS)



**KT-1022**

SQUARE DRIVE : 3/8"  
 FREE SPEED (R.P.M.) : 11000  
 MAX TORQUE : 135 NM (100 FT-LB)  
 BOLT CAPACITY : 8-10 MM  
 OVERALL LENGTH : 160 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2 LBS (0.9 KGS)

## INDUSTRIAL IMPACT WRENCH 1/2"



**KT-1111**

SQUARE DRIVE : 1/2"  
 FREE SPEED (R.P.M.) : 8100  
 MAX TORQUE: 200 NM (148 FT-LB)  
 BOLT CAPACITY : 12-14 MM  
 OVERALL LENGTH : 220 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 1.5 LBS (0.7 KGS)



**KT-1112**

SQUARE DRIVE : 1/2"  
 FREE SPEED (R.P.M.) : 7000  
 MAX TORQUE: 760NM (560 FT-LB)  
 BOLT CAPACITY : 16-18 MM  
 OVERALL LENGTH : 180 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 5.94 LBS (2.7 KGS)



**KT-1113**

SQUARE DRIVE : 1/2"  
 FREE SPEED (R.P.M.) : 8500  
 MAX TORQUE: 480 NM(354 FT-LB)  
 BOLT CAPACITY : 14 MM  
 OVERALL LENGTH : 155 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 3.3 LBS (1.5 KGS)



**KT-1114**

SQUARE DRIVE : 1/2"  
 FREE SPEED (R.P.M.) : 11000  
 MAX TORQUE:678 NM(500 FT-LB)  
 BOLT CAPACITY : 13 MM  
 OVERALL LENGTH : 124 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2.86 LBS 1(1.3 KGS)



**KT-1115**

SQUARE DRIVE : 1/2"  
 FREE SPEED (R.P.M.) : 9000  
 MAX TORQUE: 610 NM (450 FT-LB)  
 BOLT CAPACITY : 12-14 MM  
 OVERALL LENGTH : 122 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2.9 LBS (1.3 KGS)



**KT-1116**

SQUARE DRIVE : 1/2"  
 FREE SPEED (R.P.M.) : 10000  
 MAX TORQUE:1356NM (1000FT-LB)  
 BOLT CAPACITY : 16-18 MM  
 OVERALL LENGTH : 193 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 4.41 LBS (2 KGS)



**KT-1117**

SQUARE DRIVE : 1/2"  
 FREE SPEED (R.P.M.) : 10000  
 MAX TORQUE: 610 NM (450 FT-LB)  
 BOLT CAPACITY : 14-16 MM  
 OVERALL LENGTH : 260 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 3.08 LBS (1.4 KGS)



**KT-1118**

SQUARE DRIVE : 1/2"  
 FREE SPEED (R.P.M.) : 7500  
 MAX TORQUE:1050NM (774FT-LB)  
 BOLT CAPACITY : 12-14 MM  
 OVERALL LENGTH : 193 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 4.85 LBS (2.2 KGS)



**KT-1119**

SQUARE DRIVE : 1/2"  
 FREE SPEED (R.P.M.) : 7500  
 MAX TORQUE:1320NM (974FT-LB)  
 BOLT CAPACITY : 16 MM  
 OVERALL LENGTH : 193 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 4.85 LBS (2.2 KGS)

## INDUSTRIAL IMPACT WRENCH 3/4"



**KT-1210**

SQUARE DRIVE : 3/4"  
 FREE SPEED (R.P.M.) : 5100  
 MAX TORQUE:1500NM(1100 FT-LB)  
 BOLT CAPACITY : 16-30 MM  
 OVERALL LENGTH : 230 MM  
 AIR INLET : 3/8" PT  
 AIR HOSE : 1/2" I.D.  
 NET WEIGHT : 10.8 LBS (4.9 KGS)



**KT-1211**

SQUARE DRIVE : 3/4"  
 FREE SPEED (R.P.M.) : 4700  
 MAX TORQUE:1450NM(1070 FT-LB)  
 BOLT CAPACITY : 14-30 MM  
 OVERALL LENGTH : 210 MM  
 AIR INLET : 3/8" PT  
 AIR HOSE : 1/2" I.D.  
 NET WEIGHT : 9.26 LBS (4.2 KGS)



**KT-1212**

SQUARE DRIVE : 3/4"  
 FREE SPEED (R.P.M.) : 7500  
 MAX TORQUE:1050NM  
 BOLT CAPACITY : 16-30 MM  
 OVERALL LENGTH : 230 MM  
 AIR INLET : 3/8" PT  
 AIR HOSE : 1/2" I.D.  
 NET WEIGHT : 2.2 KGS



**KT-1213**

SQUARE DRIVE : 3/4"  
 FREE SPEED (R.P.M.) : 4600  
 MAX TORQUE:1600NM(1180 FT-LB)  
 BOLT CAPACITY : 16-30 MM  
 OVERALL LENGTH : 240 MM  
 AIR INLET : 3/8" PT  
 AIR HOSE : 1/2" I.D.  
 NET WEIGHT : 7.94 LBS (3.6 KGS)

# INDUSTRIAL IMPACT WRENCH 1"



**KT-1301**

SQUARE DRIVE : 1"  
 FREE SPEED (R.P.M.) : 4000  
 MAX TORQUE : 3200 NM (2358 FT-LB)  
 BOLT CAPACITY : 42 MM  
 OVERALL LENGTH : 340 MM  
 AIR INLET : 1/2" PT  
 AIR HOSE : 1/2" I.D.  
 NET WEIGHT : 26.4 LBS (12 KGS)



**KT-1302**

SQUARE DRIVE : 1"  
 FREE SPEED (R.P.M.) : 4000  
 MAX TORQUE : 2900 NM (2137 FT-LB)  
 BOLT CAPACITY : 48 MM  
 OVERALL LENGTH : 520 MM  
 AIR INLET : 1/2" PT  
 AIR HOSE : 1/2" I.D.  
 NET WEIGHT : 28.6 LBS (13 KGS)



**KT-1303**

SQUARE DRIVE : 1"  
 FREE SPEED (R.P.M.) : 3500  
 MAX TORQUE : 4500 NM (3317 FT-LB)  
 BOLT CAPACITY : 55 MM  
 OVERALL LENGTH : 625 MM  
 AIR INLET : 1/2" PT  
 AIR HOSE : 1/2" I.D.  
 NET WEIGHT : 30.8 LBS (14 KGS)

# INDUSTRIAL SCREW DRIVER



**KT-1401S**

SQUARE DRIVE : 1/4"  
 FREE SPEED (R.P.M.) : 10000  
 MAX TORQUE : 35 NM (30 FT-LB)  
 BOLT CAPACITY : 4-6 MM  
 OVERALL LENGTH : 190 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 1.78 LBS (0.8 KGS)



**KT-1402S**

SQUARE DRIVE : 1/4"  
 FREE SPEED (R.P.M.) : 9500  
 MAX TORQUE : 130 NM (96 FT-LB)  
 BOLT CAPACITY : 6-8 MM  
 OVERALL LENGTH : 195 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2.31 LBS (1.05 KGS)



**KT-1403S**

SQUARE DRIVE : 1/4"  
 FREE SPEED (R.P.M.) : 8500  
 MAX TORQUE : 40 NM (130 FT-LB)  
 BOLT CAPACITY : 8-12 MM  
 OVERALL LENGTH : 200 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2.43 LBS (1.1 KGS)



**KT-1404S**

SQUARE DRIVE : 1/4"  
 FREE SPEED (R.P.M.) : 7500  
 MAX TORQUE : 130 NM (96 FT-LB)  
 BOLT CAPACITY : 6-8 MM  
 OVERALL LENGTH : 202 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2.2 LBS (1 KGS)



**KT-1405S**

SQUARE DRIVE : 1/4"  
 FREE SPEED (R.P.M.) : 1700  
 MAX TORQUE : 3 NM (2.7 FT-LB)  
 OVERALL LENGTH : 235 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 1.3 LBS (0.6 KGS)



**KT-1406S**

SQUARE DRIVE : 1/4"  
 FREE SPEED (R.P.M.) : 1800  
 MAX TORQUE : 5-13 NM  
 OVERALL LENGTH : 240 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2.4 LBS (1.1 KGS)



**KT-1407S**

SQUARE DRIVE : 1/4"  
 FREE SPEED (R.P.M.) : 800  
 MAX TORQUE : 5-16 NM  
 OVERALL LENGTH : 258 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2.6 LBS (1.2 KGS)



**KT-1408L**

SQUARE DRIVE : 1/4"  
 FREE SPEED (R.P.M.) : 5000  
 MAX TORQUE : 46 NM (34 FT-LB)  
 BOLT CAPACITY : 4-6 MM  
 OVERALL LENGTH : 260 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 3.3 LBS (1.5 KGS)



**KT-1409L**

SQUARE DRIVE : 1/4"  
 FREE SPEED (R.P.M.) : 10000  
 MAX TORQUE : 140 NM  
 OVERALL LENGTH : 220 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 3.08 LBS (1.4 KGS)

# INDUSTRIAL PISTOL SCREW DRIVER



**KT-1501P**

SQUARE DRIVE : 1/4"  
 FREE SPEED (R.P.M.) : 10000  
 MAX TORQUE: 35NM(30FT-LB)  
 BOLT CAPACITY : 4-6 MM  
 OVERALL LENGTH : 145 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT: 2.42 LBS(1.1 KGS)



**KT-1502P**

SQUARE DRIVE : 1/4"  
 FREE SPEED (R.P.M.) : 9500  
 MAX TORQUE: 130NM(96FT-LB)  
 BOLT CAPACITY : 6-8 MM  
 OVERALL LENGTH : 155 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT: 2.64 LBS(1.2 KGS)



**KT-1503P**

SQUARE DRIVE : 1/4"  
 FREE SPEED (R.P.M.) : 8000  
 MAX TORQUE: 130NM(96FT-LB)  
 BOLT CAPACITY : 6-8 MM  
 OVERALL LENGTH : 155 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT: 2.64 LBS(1.2 KGS)



**KT-1504P**

SQUARE DRIVE : 1/4"  
 FREE SPEED (R.P.M.) : 9000  
 MAX TORQUE: 160NM(118FT-LB)  
 BOLT CAPACITY : 8-10 MM  
 OVERALL LENGTH : 170 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT: 3.34 LBS(1.52 KGS)



**KT-1505P**

SQUARE DRIVE : 1/4"  
 FREE SPEED (R.P.M.) : 9000  
 MAX TORQUE: 180NM(133FT-LB)  
 BOLT CAPACITY : 10-12 MM  
 OVERALL LENGTH : 170 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT: 3.19 LBS(1.45 KGS)



**KT-1506P**

SQUARE DRIVE : 1/4"  
 FREE SPEED (R.P.M.) : 7300  
 MAX TORQUE: 200 NM (148FT-LB)  
 BOLT CAPACITY : 10-12 MM  
 OVERALL LENGTH : 175 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2.6 LBS (1.2 KGS)



**KT-1507P**

SQUARE DRIVE : 1/4"  
 FREE SPEED (R.P.M.) : 7500  
 MAX TORQUE: 200 NM (148 FT-LB)  
 BOLT CAPACITY : 10-12 MM  
 OVERALL LENGTH : 190 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2.6 LBS (1.2 KGS)



**STRAIGHT HANDLE  
 LEVER START SHUT-OFF SCREW DRIVER**



**STRAIGHT HANDLE  
 PUSH START SHUT-OFF SCREW DRIVER**

**PUSH START AUTO SHUT OFF NOISELESS SCREW DRIVER**

**KOYAX AIR SCREW DRIVER HAS FOLLOWING FEATURES**  
 ACCURACY : KOYAX PROVIDE CLUTCH WITH ±3% DEVIATION OF TORQUE.  
 ASSURE THE BEST QUALITY.  
 ECONOMIC : WIDE-RANGING TORQUE AND LONGER LIFE CYCLE OF MOTOR.  
 DELICACY : COMBINATION OF ART, ERGONOMICS AND MECHANICAL DESIGN.  
 TECHNOLOGY : SPECIAL MECHANICAL STRUCTURE AND MOTOR GIVE YOU LOW NOISE.  
 LOW VIBRATION AND HIGH ACCURACY.

Model No.	Free Speed	Weight	O.A.L.	Diameter	Noise Level	Air hose bore Air Inlet 6Kg/cm <sup>3</sup>	Air Consumption	Torque range	Standard deviation	Fastening Capacity	
										Machine Screw Dia	Tapping Screw Dia.
	r.p.m.	gm	mm	mm	±2dBA	mm	m <sup>3</sup> /min	Kgf-cm	%		
T10PB	1000	430	180	29	74	5.00	0.20	0.5-2	±3	M1.0-M2.2	M1.1-M1.7
T30PB	1800	430	180	29	74	6.35	0.28	2-16	±3	M2.2-M4.2	M1.6-M3.2
T35PB	2200	430	180	29	74	6.35	0.28	3-20	±3	M2.4-M4.5	M2.0-M3.5
T40PB	1000	430	180	29	74	6.35	0.28	5-30	±3	M2.8-M5.0	M2.2-M4.0
T45PB	800	430	180	29	74	8.00	0.30	8-40	±3	M3.6-M5.7	M2.7-M4.4
T48PB	1800	770	215	37	78	9.50	0.55	7-50	±3	M2.9-M6.0	M2.6-M4.7
T50PB	1400	770	215	37	78	9.50	0.55	7-55	±3	M2.9-M6.0	M2.6-M4.9
T55PB	1000	770	215	37	78	9.50	0.55	7-65	±3	M2.9-M6.4	M2.6-M5.4
T60PB	550	770	215	37	78	9.50	0.55	15-95	±3	M4.1-M7.0	M3.3-M6.0
T65PB	300	810	215	37	78	9.50	0.55	30-180	±3	M5.0-M9.0	M4.0-M7.0
T68PB	250	1100	215	39	78	10.00	0.60	50-280	±3	M6-M11	M4.9-M8.7

Note : 3/8" Sq. Drive Models available for T60/T65/T68

# INDUSTRIAL PISTOL & ANGLE SCREW DRIVER

## PISTOL HANDLE TRIGGER START SHUT-OFF AIR SCREW DRIVERS



Model No.	Free Speed	Weight	O.A.L.	Diameter	Noise Level	Air hose bore Air Inlet 6Kg/cm <sup>3</sup>	Air Consumption	Torque range	Vibration level	Standard deviation	Fastening Capacity	
											Machine Screw Dia	Tapping Screw Dia.
	r.p.m.	gm	mm	mm	±2dBA	mm	m <sup>3</sup> /min	Kgf-cm	ms <sup>2</sup>	%		
R41BBP	1000	640	180	33	78	6.35	0.28	5-35	<2.5	±3	M2.8-M5.2	M2.2-M4.2
R50BBP	1400	980	215	39	78	9.50	0.55	10-60	<2.5	±3	M3.6-M6.3	M2.8-M5.0
R55BBP	1000	980	215	39	78	9.50	0.55	12-75	<2.5	±3	M3.8-M6.6	M3.0-M5.4
R60BBP	550	980	215	39	78	9.50	0.55	30-110	<2.5	±3	M5.0-M7.8	M4.0-M6.2
R65BBP	300	1100	215	39	78	9.50	0.55	30-180	<2.5	±3	M5.0-M9.5	M4.4-M7.5
R68BBP	250	1100	215	39	78	10.00	0.60	50-280	<2.5	±3	M6.0-M11.0	M4.9-M8.7

## ANGLE TYPE LEVER START SHUT-OFF AIR SCREW DRIVERS



Model No.	Free Speed	Weight	O.A.L.	Diameter	Noise Level	Air hose bore Air Inlet 6Kg/cm <sup>3</sup>	Air Consumption	Torque range	Vibration level	Standard deviation	Fastening Capacity	
											Machine Screw Dia	Tapping Screw Dia.
	r.p.m.	gm	mm	mm	±2dBA	mm	m <sup>3</sup> /min	Kgf-cm	ms <sup>2</sup>	%		
T40AB	1000	710	280	32	78	9.50	0.55	5-35	<2.5	±3	M2.5-M5.0	M2.2-M4.0
T50AB	1400	1100	335	37	78	9.50	0.55	7-50	<2.5	±3	M2.9-M6.0	M2.6-M4.9
T55AB	1000	1100	335	37	78	9.50	0.55	7-65	<2.5	±3	M2.9-M6.4	M2.6-M5.4
T60AB	550	1100	335	37	78	9.50	0.55	15-95	<2.5	±3	M4.1-M7.0	M3.3-M6.0
T65AB	300	1100	335	37	78	9.50	0.55	30-180	<2.5	±3	M5.1-M9.0	M4.4-M7.0

Note : 3/8" Sq. Drive Models available

## INDUSTRIAL DRILL & TAPPER



**KT-1601S**

CHUCK SIZE : 10 MM  
 FREE SPEED (R.P.M.) : 1800  
 OVERALL LENGTH : 216 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2 LBS (0.9 KGS)



**KT-1602L**

CHUCK SIZE : 10 MM  
 FREE SPEED (R.P.M.) : 1800  
 OVERALL LENGTH : 216 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2.43 LBS (1.1 KGS)



**KT-1603P**

CHUCK SIZE : 10 MM  
 FREE SPEED (R.P.M.) : 1800  
 OVERALL LENGTH : 165 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2 LBS (0.9 KGS)



**KT-1604P**

CHUCK SIZE : 13 MM  
 FREE SPEED (R.P.M.) : 800  
 OVERALL LENGTH : 113 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2.87 LBS (1.3 KGS)



**KT-1605PT**

CHUCK SIZE : 10 MM  
 FREE SPEED (R.P.M.) : 1500  
 OVERALL LENGTH : 156 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2 LBS (0.9 KGS)



**KT-1606PT**

CHUCK SIZE : 13 MM  
 FREE SPEED (R.P.M.) : 700  
 OVERALL LENGTH : 205 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 3.57 LBS (1.62 KGS)

## INDUSTRIAL RATCHET WRENCH



**KT-1701**

SQUARE DRIVE (QC) : 1/4" OR 3/8"  
 FREE SPEED (R.P.M.) : 240  
 MAX TORQUE: 41-50NM (27-31 FT-LB)  
 BOLT CAPACITY : 6 MM  
 OVERALL LENGTH : 170 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 1.32 LBS (0.6 KGS)



**KT-1702**

SQUARE DRIVE (QC) : 1/2" OR 3/8"  
 FREE SPEED (R.P.M.) : 160  
 MAX TORQUE : 88 NM (65 FT-LB)  
 BOLT CAPACITY : 10 MM  
 OVERALL LENGTH : 254 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2.57 LBS (1.17 KGS)



**KT-1703**

SQUARE DRIVE (QC) : 1/2" OR 3/8"  
 FREE SPEED (R.P.M.) : 160  
 MAX TORQUE : 115 NM (85 FT-LB)  
 BOLT CAPACITY : 10 MM  
 OVERALL LENGTH : 256 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2.75 LBS (1.25 KGS)



**KT-1704**

SQUARE DRIVE (QC) : 1/2" OR 3/8"  
 FREE SPEED (R.P.M.) : 280  
 MAX TORQUE : 108 NM (80 FT-LB)  
 BOLT CAPACITY : 12 MM  
 OVERALL LENGTH : 277 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2.6 LBS (1.2 KGS)



# INDUSTRIAL RATCHET WRENCH (NARROW SPACE)



**KT-1705NS**



**KT-1706NS**



**KT-1707NS**



**KT-1708NS**



**KT-1709NS**



**KT-1710NS**



**KT-1711NS**


## REAR EXHAUST

- ▶ THE RATCHET WRENCH CAN BE USED IN NARROW WORKING SPACES AND CAN FASTEN BOLTS AND NUTS EASILY. THIS SPACIAL TOOL CAN BE REACHED TIGHT CPLACE THAT OTHER AIR TOOLS CAN NOT.
- ▶ REMOVE: FIRST, LOOSEN NUT BY WRENCH THEN TAKE NUT OUT WITH AIR RATCHET.

### Technical Specification (air pressure at 90 psi \ 6.2 bar \ 6.3 kg/cm<sup>2</sup>)

Model	Hex Size	Working Torque		Max. Torque		Free Speed	Air Consumption		Overall Length		Air Inlet	Net Weight		Sound Level
	mm	Nm	ft-lb	Nm	ft-lb	rpm	l/min	cfm	mm	inch	P.T	Kg	lb	dB(A)
KT-1705NS	6, 7, 8, 10, 11, 12, (1/4", 3/8")	10	7	10	7	180	127	4.5	300	11.81	1/4	1.30	2.87	86
KT-1706NS	10, 11, 12, 13, 14, (1/2", 9/16")	15	11	25	18	220	212	7.5	332	13.07	1/4	1.92	4.23	87
KT-1707NS	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, (11/16")	15	11	25	18	190	212	7.5	338	13.30	1/4	2.00	4.40	87
KT-1708NS	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, (11/16")	80	59	90	66	150	353	12.5	390	15.35	1/4	2.42	5.33	92
KT-1709NS	21, 22, 23, 24, 26, 27	80	59	90	66	130	353	12.5	398	15.66	1/4	2.48	5.46	92
KT-1710NS	29, 30, 32	80	59	90	66	110	353	12.5	405	15.94	1/4	2.50	5.51	92
KT-1711NS	36	80	59	90	66	100	353	12.5	408	16.06	1/4	2.52	5.55	92

# INDUSTRIAL RATCHET WRENCH (NARROW SPACE)

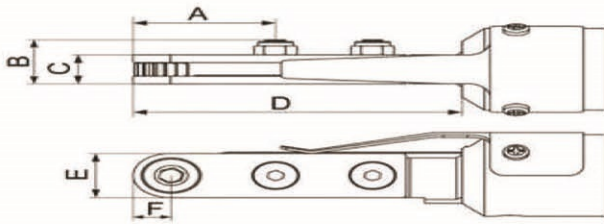

Model	A	B	C	D	E	F
	mm	mm	mm	mm	mm	mm
KT-1705NS	38.2	20	13.2	88.2	20	10.2
KT-1706NS	44.4	26	18	109	25.2	12.2
KT-1707NS	51	26	18	115	33.2	16.6
KT-1708NS	51	26	18	115	33.2	16.6
KT-1709NS	59	26	18	123	41	20.5
KT-1710NS	66	26	18	130	48	24
KT-1711NS			18			

## Ratchet Wrench Order Code Reference

Model	KT-1705NS	KT-1706NS	KT-1707NS	KT-1708NS	KT-1709NS	KT-1710NS	KT-1711NS
<b>Hex Size</b>	<b>Order Code</b>						
6 mm	KT-1705NS-6						
7 mm	KT-1705NS-7						
8 mm	KT-1705NS-8						
9 mm	KT-1705NS-9						
10 mm	KT-1705NS-10	KT-1706NS-10	KT-1707NS-10	KT-1708NS-10			
11 mm	KT-1705NS-11	KT-1706NS-11	KT-1707NS-11	KT-1708NS-11			
12 mm	KT-1705NS-12	KT-1706NS-12	KT-1707NS-12	KT-1708NS-12			
13 mm		KT-1706NS-13	KT-1707NS-13	KT-1708NS-13			
14 mm		KT-1706NS-14	KT-1707NS-14	KT-1708NS-14			
15 mm			KT-1707NS-15	KT-1708NS-15			
16 mm			KT-1707NS-16	KT-1708NS-16			
17 mm			KT-1707NS-17	KT-1708NS-17			
18 mm			KT-1707NS-18	KT-1708NS-18			
19 mm			KT-1707NS-19	KT-1708NS-19			
21 mm					KT-1709NS-21		
22 mm					KT-1709NS-22		
23 mm					KT-1709NS-23		
24 mm					KT-1709NS-24		
26 mm					KT-1709NS-26		
27 mm					KT-1709NS-27		
29 mm						KT-1710NS-29	
30 mm						KT-1710NS-30	
32 mm						KT-1710NS-32	
36 mm							KT-1711NS-36
1/4"	KT-1705NS-1/4						
3/8"	KT-1705NS-3/8						
1/2"		KT-1706NS-1/2					
9/16"		KT-1706NS-9/16					
11/16"			KT-1707NS-11/16	KT-1708NS-11/16			

# INDUSTRIAL DIE & MICRO DIE GRINDER



**KT-1801**

COLLET : 3, 2.38 MM  
 FREE SPEED (R.P.M.) : 70000  
 OVERALL LENGTH : 150 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 0.35 LBS (0.16 KGS)



**KT-1802**

COLLET : 3 MM  
 FREE SPEED (R.P.M.) : 65000  
 OVERALL LENGTH : 130 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 0.66 LBS (0.3 KGS)



**KT-1803**

COLLET : 6 MM  
 FREE SPEED (R.P.M.) : 22000  
 OVERALL LENGTH : 175 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 1.3 LBS (0.6 KGS)



**KT-1804**

COLLET : 6 MM  
 FREE SPEED (R.P.M.) : 35000  
 OVERALL LENGTH : 124 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 0.99 LBS (0.45 KGS)

## INDUSTRIAL DIE & MICRO DIE GRINDER



**KT-1805**

COLLET : 6 MM  
 FREE SPEED (R.P.M.):20000  
 OVERALL LENGTH:150 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 0.45 KGS



**KT-1806T**

COLLET : 6 MM  
 FREE SPEED (R.P.M.):32000  
 OVERALL LENGTH:180 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 0.73 KGS



**KT-1807**

COLLET : 6 MM  
 FREE SPEED (R.P.M.):24000  
 OVERALL LENGTH:180 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 0.7 KGS



**KT-1808**

COLLET : 3 MM  
 FREE SPEED (R.P.M.):32000  
 OVERALL LENGTH:158 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 0.3 KGS



**KT-1809**

COLLET : 6 MM  
 FREE SPEED (R.P.M.):21000  
 OVERALL LENGTH:317 MM  
 AIR INLET : 3/8" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2.5 KGS

## INDUSTRIAL ANGLE GRINDER



**KT-1901**

BLADE DIA : 2"  
 FREE SPEED (R.P.M.) : 15000  
 ANGLE (DEGREE) : 90  
 OVERALL LENGTH : 135 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 1.54 LBS (0.7 KGS)



**KT-1902**

BLADE DIA : 2"  
 FREE SPEED (R.P.M.) : 15000  
 ANGLE (DEGREE) : 90  
 OVERALL LENGTH : 140 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 1.80 LBS (0.82 KGS)



**KT-1903**

BLADE DIA : 4"  
 FREE SPEED (R.P.M.) : 12000  
 ANGLE (DEGREE) : 90  
 OVERALL LENGTH : 228 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 3.88 LBS (1.76 KGS)



**KT-1904**

BLADE DIA : 5"  
 FREE SPEED (R.P.M.) : 12000  
 ANGLE (DEGREE) : 90  
 OVERALL LENGTH : 228 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 3.97 LBS (1.8 KGS)



**KT-1905**

BLADE DIA : 4"  
 FREE SPEED (R.P.M.) : 10000  
 ANGLE (DEGREE) : 90  
 OVERALL LENGTH : 245 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 5.51 LBS (2.5 KGS)



**KT-1906**

BLADE DIA : 5"  
 FREE SPEED (R.P.M.) : 10000  
 ANGLE (DEGREE) : 90  
 OVERALL LENGTH : 245 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 5.73 LBS (2.6 KGS)



**KT-1907**

BLADE DIA : 7"  
 FREE SPEED (R.P.M.) : 7000  
 ANGLE (DEGREE) : 90  
 OVERALL LENGTH : 343 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 1.45 LBS (3.2 KGS)

# INDUSTRIAL SANDER



**KT-2001**

PAD : 3" & 3.5"  
 FREE SPEED (R.P.M.) : 12000  
 OVERALL LENGTH : MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2.2 LBS (1 KGS)



**KT-2002**

PAD : 5" & 6"  
 FREE SPEED (R.P.M.) : 12000  
 OVERALL LENGTH : MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 1.98 LBS (0.9 KGS)



**KT-2003**

PAD : 5" & 6"  
 FREE SPEED (R.P.M.) : 12000  
 OVERALL LENGTH : MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2.2 LBS (1 KGS)



**KT-2004**

PAD : 5" & 6"  
 FREE SPEED (R.P.M.) : 11000  
 OVERALL LENGTH : MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 1.98 LBS (0.9 KGS)



**KT-2005**

PAD : 5" & 6"  
 FREE SPEED (R.P.M.) : 12000  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT:1.54 LBS (0.7 KGS)



**KT-2006**

PAD : 5" & 6"  
 FREE SPEED (R.P.M.) : 12000  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.



**KT-2007**

PAD : 5" & 6"  
 FREE SPEED (R.P.M.) : 12000  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.



**KT-2008**

PAD : 5" & 6"  
 FREE SPEED (R.P.M.) : 12000  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.



**KT-2009**

PAD : 3"  
 FREE SPEED (R.P.M.) : 17000  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT:1.78 LBS (0.81 KGS)

# INDUSTRIAL BELT SANDER & HIGH SPEED SANDER



**KT-2101**

BELT : 10 X 330 MM  
 FREE SPEED (R.P.M.) : 20000  
 OVERALL LENGTH : 320 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT:1.76 LBS(0.8 KGS)



**KT-2102**

BELT : 20 X 520 MM  
 FREE SPEED (R.P.M.) : 18000  
 OVERALL LENGTH : 430 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT: 3.08 LBS(1.4 KGS)



**KT-2201**

PAD : 3"  
 FREE SPEED (R.P.M.) : 17000  
 OVERALL LENGTH : 165 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT:1.67 LBS(0.76 KGS)



**KT-2202**

PAD : 5"  
 FREE SPEED (R.P.M.) : 16000  
 OVERALL LENGTH : 150 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT: 2 LBS(0.9 KGS)



**KT-2203**

PAD : 3", 4.5", 5"  
 FREE SPEED (R.P.M.) : 16000  
 OVERALL LENGTH : 160 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT: 2.6 LBS(1.2 KGS)

# INDUSTRIAL POLISHER & HAMMER



**KT-2301**

PAD : 3"  
 FREE SPEED (R.P.M.) : 3000  
 OVERALL LENGTH : 165 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 1.63 LBS (0.74 KGS)



**KT-2302**

PAD : 3"  
 FREE SPEED (R.P.M.) : 3200  
 OVERALL LENGTH : 160 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 1.98 LBS (0.9 KGS)



**KT-2303**

PAD : 3"  
 FREE SPEED (R.P.M.) : 2500  
 OVERALL LENGTH : 206 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 1.43 LBS (0.65 KGS)



**KT-2401**

SHANK SIZE : 10.2 MM  
 BLOW PER MIN (B.P.M.) : 5500  
 OVERALL LENGTH : 215 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 0.77 LBS (0.35 KGS)



**KT-2402**

SHANK SIZE : 10.2 MM  
 BLOW PER MIN (B.P.M.) : 3000  
 OVERALL LENGTH : 178 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 3.53 LBS (1.6 KGS)

# INDUSTRIAL CHIPPING HAMMER & WELD FLEX & SAND RAMMER



**KT-2501**

SHANK SIZE : 14.7 MM  
 BLOW PER MIN (B.P.M.) : 1950  
 OVERALL LENGTH : 380 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 14.33 LBS (6.5 KGS)



**KT-2502**

SHANK SIZE : 17.3 MM  
 BLOW PER MIN (B.P.M.) : 2400  
 OVERALL LENGTH : 327 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 13 LBS (5.9 KGS)



**KT-2601**

SHANK SIZE : 10.2 MM  
 BLOW PER MIN (B.P.M.) : 4200  
 OVERALL LENGTH : 257 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 4.41 LBS (2 KGS)



**KT-2602**

SHANK SIZE : 10.2 MM  
 BLOW PER MIN (B.P.M.) : 6500  
 OVERALL LENGTH : 330 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 3.53 LBS (1.6 KGS)



**KT-2701**

SHANK SIZE :  
 BLOW PER MIN (B.P.M.) : 800  
 OVERALL LENGTH : 460 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 9.26 LBS (4.2 KGS)

# INDUSTRIAL RIVETER



**KT-2801**

RIVET CAP. (ALUM.): 2.1-4.8 MM  
 (IRON) : 2.4-4.8 MM  
 (SS) :  
 STOCK LENGTH : 16 MM  
 TRACTION POWER:1870 LBS(848 KGS)  
 OVERALL LENGTH : 170X272 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 3.95 LBS (1.79 KGS)



**KT-2802**

RIVET CAP. (ALUM.): 2.1-4.8 MM  
 (IRON) : 2.4-4.8 MM  
 (SS) :  
 STOCK LENGTH : 18 MM  
 TRACTION POWER:1800 LBS(816 KGS)  
 OVERALL LENGTH : 254 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 3.1 LBS (1.4 KGS)



**KT-2803**

RIVET CAP. (ALUM.): 2.1-4.8 MM  
 (IRON) : 2.4-4.8 MM  
 (SS) :  
 STOCK LENGTH : 19 MM  
 TRACTION POWER : 980-1350 KGS  
 OVERALL LENGTH : 177X254 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2.34 LBS (1.06 KGS)



**KT-2804**

RIVET CAP. (ALUM.): 2.1-4.8 MM  
 (IRON) : 2.4-4.8 MM  
 (SS) : 2.4-4.8 MM  
 STOCK LENGTH : 19 MM  
 TRACTION POWER : 890-1180 KGS  
 OVERALL LENGTH : 288X254 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2.93 LBS (1.33 KGS)



**KT-2805**

RIVET CAP. (ALUM.): 4.0-6.4 MM  
 (IRON) : 4.0-6.4 MM  
 (SS) : 4.0-6.4 MM  
 STOCK LENGTH : 20 MM  
 TRACTION POWER:940-1850 KGS  
 OVERALL LENGTH:270X360 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT: 3.48 LBS(1.58 KGS)

# INDUSTRIAL RIVNUT



**KT-2901**

CAP. (CLUTCH TYPE) : M3-M6  
 FREE SPEED (R.P.M.) : 2700  
 OVERALL LENGTH : 230 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2.87 LBS (1.3 KGS)



**KT-2902**

CAP. (CLUTCH TYPE) : M6-M10  
 FREE SPEED (R.P.M.) : 700  
 OVERALL LENGTH : 200 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 2.65 LBS (1.2 KGS)



**KT-2903**

CAP. (CLUTCH TYPE) : M10-M12  
 FREE SPEED (R.P.M.) : 450  
 OVERALL LENGTH : 210 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 3.97 LBS (1.8 KGS)



**KT-2904**

CAP. (CLUTCH TYPE) : M3-M12  
 FREE SPEED (R.P.M.) : 2000  
 OVERALL LENGTH : 280 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 4.85 LBS (2.2 KGS)

# INDUSTRIAL AIR BODY SAW & ENGRAVING PEN



**KT-3001**

CUTTING CAP. ALUM. : 2.5 MM  
 CUTTING CAP. IRON : 1.6 MM  
 STROKES/MINUTE (B.P.M.) : 10000  
 OVERALL LENGTH : 230 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 1.37 LBS (0.62 KGS)



**KT-3002**

CUTTING CAP. ALUM. : 3 MM  
 CUTTING CAP. IRON : 1.6 MM  
 STROKES/MINUTE (B.P.M.) : 9000  
 OVERALL LENGTH : 260 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 1.65 LBS (0.75 KGS)




**KT-3101**

DIAMETER : 16 MM  
 BLOWS/MINUTES (B.P.M.) : 3800  
 OVERALL LENGTH : 169 MM  
 AIR INLET : 1/4" PT  
 AIR HOSE : 3/8" I.D.  
 NET WEIGHT : 0.42 LBS (0.19 KGS)

# INDUSTRIAL ACCESSORIES

- ▶ AIR GUN
- ▶ BALANCER
- ▶ BITS
- ▶ FRL
- ▶ FRL OIL
- ▶ QRC COUPLER
- ▶ SANDING PAD
- ▶ WOOL PAD

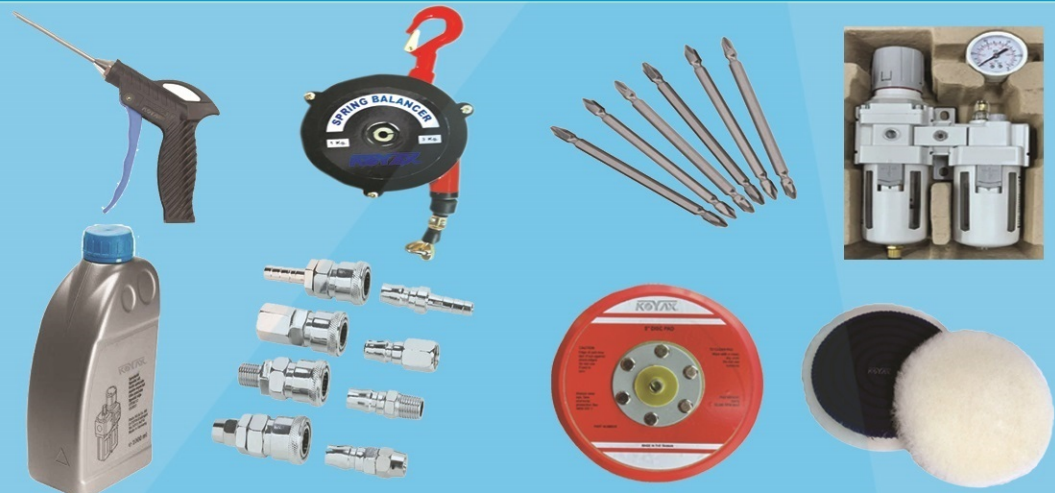

## 1/4" HEX SHANK (INSERT TYPE SCREW BITS)

### SLOTTED



TIP X LENGTH (MM)

3 X 25  
4 X 25  
5 X 25  
6 X 25

### PHILLIPS



TIP X LENGTH (MM)

PH1 X 25  
PH2 X 25  
PH3 X 25

### TORX



TIP X LENGTH (MM)

T6 / T8 X 25  
T10 / T15 X 25  
T20 / T25 X 25  
T30 / T40 X 25

### ALLEN



TIP X LENGTH (MM)

2 / 2.5 X 25  
3 / 4 X 25  
5 X 25  
6 X 25

## 1/4" HEX SHANK (DOUBLE ENDED BITS & NUT RUNNER)

### PHILLIPS



TIP X LENGTH (MM)

PH1 X 50 / 75 / 100 / 150  
PH2 X 50 / 75 / 100 / 150  
PH2 X 200 / 250 / 300  
PH3 X 50 / 75 / 100 / 150

### NUT RUNNER



A/F X LENGTH (MM)

### NUT RUNNER NON MAGNETIC



A/F X LENGTH (MM)

5 X 65  
5.5 X 65 / 100  
6 X 65  
7 X 65 / 100  
8 X 65 / 100 / 150  
10 X 65 / 100 / 150  
11 X 65 / 100  
12 X 65 / 100  
13 X 65 / 100  
14 X 65 / 100

### NUT RUNNER MAGNETIC



A/F X LENGTH (MM)

5 X 65  
5.5 X 65  
6 X 65  
7 X 65  
8 X 65  
10 X 65  
11 X 65  
1/4" X 65  
3/8" X 65

## 1/4" HEX SHANK (SINGLE ENDED BITS)

### SLOTTED



TIP X LENGTH (MM)

3 X 50 / 75 / 100  
4 X 50 / 75 / 100  
5 X 50 / 75 / 100  
6 X 50 / 75 / 100  
8 X 50 / 75  
10 X 75

### PHILLIPS



TIP X LENGTH (MM)

PH00 X 50  
PH0 X 50 / 100  
PH1 X 50 / 75 / 100 / 150  
PH2 X 50 / 75 / 100 / 150  
PH3 X 50 / 75 / 100 / 150  
PH4 X 50

### TORX



TIP X LENGTH (MM)

T5 / T6 / T7 X 50  
T8 / T10 X 50 / 75 / 100 / 150  
T15 / T20 X 50 / 75 / 100 / 150  
T25 / T30 X 50 / 75 / 100 / 150  
T35 / T40 X 50 / 75 / 100 / 150  
T45 X 50 / 75

### ALLEN



TIP X LENGTH (MM)

2 X 50  
2.5 X 50 / 100  
3 X 50 / 65 / 100  
4 X 50 / 65 / 100  
5 X 50 / 65 / 100  
6 X 50 / 65 / 100  
8 / 10 X 70

# INDUSTRIAL PISTOL & ANGLE SCREW DRIVER

## PISTOL HANDLE TRIGGER START

### RED SERIES SHUT-OFF AIR SCREW



Model No.	Free Speed	Weight	O.A.L.	Diameter	Noise Level	Air hose bore Air Inlet 6Kg/cm <sup>3</sup>	Air Consumption	Torque range	Vibration level	Standard deviation	Fastening Capacity	
											Machine Screw Dia	Tapping Screw Dia.
	r.p.m.	gm	mm	mm	±2dBA	mm	m <sup>3</sup> /min	Kgf-cm	ms <sup>2</sup>	%		
KT3240PH	1000	640	235	42	78	6.35	0.55	5-40	<2.5	±3	M3.3-M5.7	M2.7-M4.4
KT3250PH	1400	980	235	42	78	9.50	0.55	7-50	<2.5	±3	M2.9-M6.0	M2.6-M4.9
KT3255PH	1000	980	235	42	78	9.50	0.55	7-65	<2.5	±3	M2.9-M6.4	M2.6-M5.4
KT3260PH	550	980	235	42	78	9.50	0.55	15-95	<2.5	±3	M4.1-M7.0	M3.1-M6.0
KT3265PH	300	1100	235	42	78	9.50	0.55	30-180	<2.5	±3	M5.1-M9.3	M4.0-M7.2
KT3268PH	250	1100	235	42	78	10.00	0.55	50-250	<2.5	±3	M6.0-M11.0	M4.9-M8.7

## ANGLE TYPE LEVER START

### RED SERIES SHUT-OFF AIR SCREW DRIVERS



Model No.	Free Speed	Weight	O.A.L.	Diameter	Noise Level	Air hose bore Air Inlet 6Ka/cm <sup>3</sup>	Air Consumption	Torque range	Vibration level	Standard deviation	Fastening Capacity	
											Machine Screw Dia	Tapping Screw Dia.
	r.p.m.	gm	mm	mm	±2dBA	mm	m <sup>3</sup> /min	Kgf-cm	ms <sup>2</sup>	%		
KT3240AB	1000	710	260	34	78	9.50	0.28	8-40	<2.5	±3	M3.3-M5.7	M2.7-M4.4
KT3250AB	1400	1100	340	42	78	9.50	0.55	7-50	<2.5	±3	M2.9-M6.0	M2.6-M4.9
KT3255AB	1000	1100	340	42	78	9.50	0.55	7-65	<2.5	±3	M2.9-M6.4	M2.6-M5.4
KT3260AB	550	1100	340	42	78	9.50	0.55	10-90	<2.5	±3	M4.1-M7.0	M3.1-M6.0
KT3265AB	300	1100	340	42	78	9.50	0.55	30-180	<2.5	±3	M5.1-M8.0	M4.1-M7.0
KT3268AB	250	1100	340	42	78	9.50	0.55	50-250	<2.5	±3	M6.1-M9.0	M5.1-M8.0

Note : 3/8" Sq. Drive Models available



## PROFESSIONAL PNEUMATIC TOOLS



# KOYAX®

## KOYAX INTERNATIONAL PVT. LTD.

GROUND FLOOR, PLOT NO. - 22, BASERA INDUSTRIAL AREA,  
RUDRAPUR, U.S.NAGAR, UTTARAKHAND - 263153

TEL : +918006022303, +919358004215, +919997091313

EMAIL : [INFO@KOYAXTOOLS.COM](mailto:INFO@KOYAXTOOLS.COM)

WEBSITE : [HTTP://WWW.KOYAXTOOLS.COM](http://WWW.KOYAXTOOLS.COM)

## KOYAX SERVICE CENTER

### DELHI

B-3/16, FIRST FLOOR,  
SECTOR - 16, ROHINI,  
NEW DELHI - 110089

### RUDRAPUR

GROUND FLOOR, PLOT NO-22,  
BASERA COLONY,,  
RUDRAPUR,U. S. NAGAR,  
UTTARAKHAND - 263153

### DEHRADUN

H. NO. - 104/4,  
ARKEDIA GRANT, BADOWALA,  
PREM NAGAR, DEHRADUN,  
UTTARAKHAND-248007

### PUNJAB

MUNDIAN KALAN,  
NEAR AXIS BANK,  
CHANDIGARH ROAD,  
LUDHIANA, PUNJAB-141010

[www.koyaxtools.com](http://www.koyaxtools.com)